

# Cold Cup Applications

## Series 700 Sanitary Quick Change Systems with Built-in Valve in Head



The CunoOCS® line of filtration products are carefully designed to protect beverage equipment, provide consistent beverage quality, and ensure seamless beverage service.

The sanitary quick change design allows for quick and easy cartridge changeouts and minimizes contamination of the filtration media.

Its compact footprint allows the unit to be installed snugly behind the beverage unit or neatly under a cabinet.

The 700 Series housing is durable and shatter-resistant, minimizing the potential for leaks.

The built-in shut off valve allows cartridge changeouts without shutting off the water supply.

Proper fit of the cartridge is assured with a 1/4 turn.

3/8" vertical connections are compatible with common equipment and tubing installations.

Units are FDA, CFR-21 compliant for use in all food and beverage applications and are 3rd party certified for design and performance.

Three (3) premium carbon technologies are available for design and performance.

---

### Maximum Protection

CS-722

Capacity: 2,000 gallons (7,571 liters) or 266 cups/day\*

CS-732

Capacity: 3,000 gallons (11,356 liters) or 400 cups/day\*

#### Features

- Graded density, compressed carbon block
- 0.5 micron cyst, turbidity, fine sediment reduction
- Chlorine taste and odor reduction

#### Benefits

- Does not require activation
- Extends contact time for maximum chlorine and sediment reduction
- Extended protection and long life
- Enhances beverage quality over the life of the filter

---

### General Purpose

CS-712

Capacity: 2,500 gallons (9,464 liters) or 333 cups/day\*

CS-772

Capacity: 3,500 gallons (13,249 liters) or 466 cups/day\*

#### Features

- Graded density, multi-composite carbon block
- 1.0 micron sediment reduction
- Chlorine taste and odor reduction

#### Benefits

- Does not require activation
- Enhances beverage clarity
- Enhances beverage quality over the life of the filter

---

### Problem Water

CS-762

Capacity: 2,400 gallons (9,085 liters) or 320 cups/day\*

#### Features

- Built-in 5 micron prefiltration
- Chlorine taste and odor reduction

#### Benefits

- Suitable for water conditions with heavy dirt load
- Reduces maintenance caused by clogged valves and orifices
- Enhances beverage quality over the life of the filter

\*Cups/day based on 8oz cup (237 ml), 20 day work month and 6 month changeout schedule.

## Quotation for Specified CunoOCS® Water Filters

Specified Model # \_\_\_\_\_


Part # \_\_\_\_\_

Price Quoted \_\_\_\_\_

Installed on what equipment \_\_\_\_\_

\_\_\_\_\_

Quantity Required \_\_\_\_\_

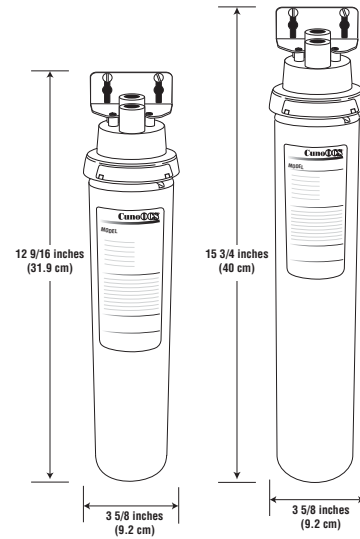

## Applications/Specifications

Model#	Part#	System Dimensions in (cm)	Replacement Cartridge	Part#	Chlorine Taste and Odor	Scale Inhibition	Sediment Reduction	Heavy Sediment Reduction	Cyst Removal	Turbidity Reduction	Capacity Gals. (liters)	Flow Rate gpm (lpm)	Carton Wt. lbs. (kilos)	Carton Dimensions cu. ft.(cu. m.)	Case Qty
CS-722	55889-14	12 9/16 x 3 5/8 (31.9 x 9.2)	CS-22	55895-07	✓		✓		✓	✓	2,000 (7,571)	1.0 (3.78)	26 (11.8)	1.8 (0.05)	12
CS-732	55889-16	15 3/4 x 3 5/8 (40 x 9.2)	CS-32	55817-23	✓		✓		✓	✓	3,000 (11,356)	1.0 (3.78)	20 (9.1)	1.53 (0.04)	12
CS-712	55889-12	12 9/16 x 3 5/8 (31.9 x 9.2)	CS-12	55895-03	✓		✓				2,500 (9,464)	1.0 (3.78)	26 (11.8)	1.8 (0.05)	12
CS-772	55889-04	15 3/4 x 3 5/8 (40 x 9.2)	CS-72	55817-15	✓		✓				3,500 (13,249)	1.0 (3.78)	20 (9.1)	1.53 (0.04)	12
CS-762	55889-02	12 9/16 x 3 5/8 (31.9 x 9.2)	CS-62	55584-04	✓			✓			2,400 (9,085)	1.0 (3.78)	26 (11.8)	1.8 (0.05)	12

For cold water use only. This product is for commercial use only. All materials are FDA compliant with CFR title 21.

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts. EPA Establishment No. 070595-CT-001



CunoOCS products contain one or more of the following NSF listed head/cartridge combinations:

CS-722/CS-22  
 CS-732/CS-32  
 CS-712/CS-12  
 CS-772/CS-72  
 CS-762/CS-62

Refer to the PDS sheet for the certified claims.

### Distributed By:

### LIMITED ONE YEAR WARRANTY

CUNO Incorporated warrants to the original purchaser-consumer that this product is free of defects in materials and workmanship. Any defect, malfunction, or other failure of the product to conform to this warranty will be remedied by CUNO.

This warranty, together with any and all warranties implied by law, shall be limited to a duration of one (1) year from the original purchase by the consumer.

This warranty does not apply to defects that result from abuse, misuse, alteration or damage not caused by CUNO. See warranty card for full details.

## Service Worldwide

CUNO Pacific Pty. Ltd  
 P.O. Box 6767  
 140 Sunnyholt Road  
 Blacktown, N.S.W. 2148 Australia

CUNO Filtration Asia Pte. Ltd.  
 1 Tech Park Crescent  
 Tuas Tech Park  
 Singapore 638131

CUNO Europe S.A.  
 1 Boulevard de l'OLSE  
 95030 Cergy-Pontoise Cedex  
 France



CUNO K.K.  
 Hodogaya Station Building 6F  
 1-7 Iwai-cho, Hodogaya-ku  
 Yokohama, 240 Japan

Commercial Intertech Do Brazil - Divisão CUNO  
 Rua Amf Do Brazil 251  
 18120-000 Mairinque-Sp  
 Brazil



CUNO Incorporated  
 400 Research Parkway  
 Meriden, CT 06450 U.S.A.  
 Toll Free: 1-888-218-CUNO  
 Worldwide: 203-237-5541  
 Fax: 203-238-8701  
 www.cuno.com